




PCB terminal block — TLM series (Screwless Type) — TLM-704V

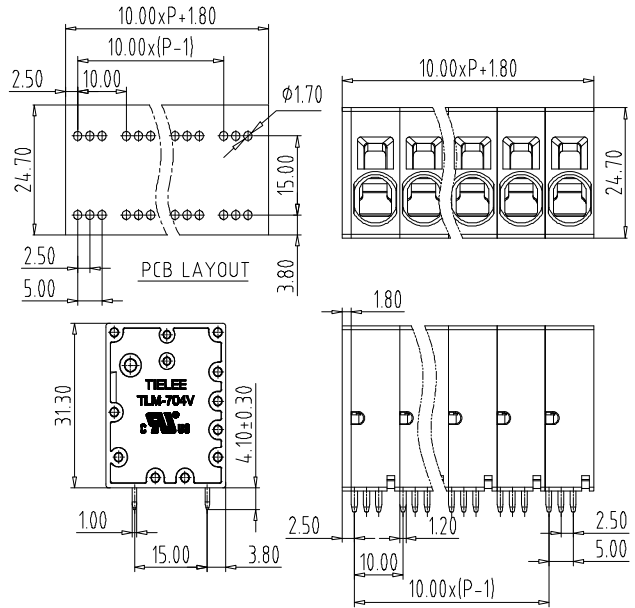

图示(Pic. shown) : TLM-704V-04P-G12

General:
PCB terminal block Rated:1000V(320V ≥02P),76A 16mm²
Single row , 10.0mm pitch , 01-12 Pole
Wiring orientation:90°(wire-to-board)
Screwless Type

认证 (Approval) :  

技术参数 Technical Data	UL standard			IEC standard		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	150V	300V	1000V 76A 01P	1000V 76A 01P	1000V 76A 01P
额定电流(Rated current)	70A	70A	10A	250V 76A ≥02P	320V 76A ≥02P	630V 76A ≥02P
额定连接容量(Rated connection capacity)	20-4 AWG Sol&Str			0.75-16mm ² Sol&Str		
绝缘材料(Insulation Material)	PA66 UL94 V-0			PA66 UL94 V-0		
电流承载部件材料和镀层(Material & Plating of Current carrier)	Copper alloy , Tin plated			Copper alloy , Tin plated		
接线弹片材料(Material of Clamp spring)	Stainless Steel (GrNi)			Stainless Steel (GrNi)		
绝缘电阻(Insulation Resistance)	500MΩ or more at DC500V			500MΩ or more at DC500V		
耐电压(1分钟)(Withstanding Voltage/1Min)	--			--		
额定冲击电压(Rated surge voltage)	6KV			6KV		
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)	--			--		
固定螺丝(Mounting Screw) , 扭矩(torque)	--			--		
剥线长度(Wire stripping length)	18mm			18mm		
使用温度(Operating temperature)	-40°C up to +115°C			-40°C up to +115°C		
焊接方式(Soldering recommend)	Wave soldering ,260°C 5S Max (Single Wave) , 260°C 10S Max(Double Wave)					

订购方式(How to order)

