




PCB terminal block — TLM series ( Screwless Type ) — TLM-704R

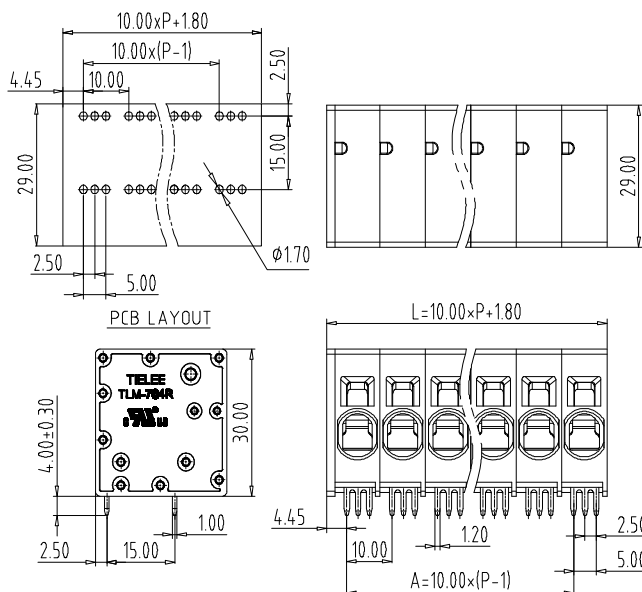


■ 图示(Pic. shown) : TLM-704R-04P-G12

General:  
PCB terminal block Rated:1000V(320V  $\geq$  02P),76A 16mm<sup>2</sup>  
Single row , 10.00mm pitch , 01-12 Pole  
Wiring orientation:180°(wire-to-board)  
Screwless Type

认证 ( Approval ) :  

技术参数 Technical Data	UL standard			IEC standard		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	150V	300V	1000V 76A 01P	1000V 76A 01P	1000V 76A 01P
额定电流(Rated current)	70A	70A	10A	250V 76A $\geq$ 02P	320V 76A $\geq$ 02P	630V 76A $\geq$ 02P
额定连接容量(Rated connection capacity)	20-4 AWG Sol&Str			0.75-16mm <sup>2</sup> Sol&Str		
绝缘材料(Insulation Material)	PA66 UL94 V-0					
电流承载部件材料和镀层( Material & Plating of Current carrier )	Copper alloy , Tin plated					
接线弹片材料(Material of Clamp spring )	Stainless Steel ( GrNi )					
绝缘电阻(Insulation Resistance)	500M $\Omega$ or more at DC500V					
耐电压(1分钟)(Withstanding Voltage/1Min)	--					
额定冲击电压(Rated surge voltage)	6KV					
接线螺丝(Wire clamp unit Screw) , 最大扭矩( torque Max. )	--					
固定螺丝(Mounting Screw) , 扭矩(torque)	--					
剥线长度(Wire stripping length)	18mm					
使用温度(Operating temperature)	-40°C up to +115°C					
焊接方式(Soldering recommend)	Wave soldering ,260°C 5S Max (Single Wave) , 260°C 10S Max(Double Wave)					

■ 订购方式(How to order)

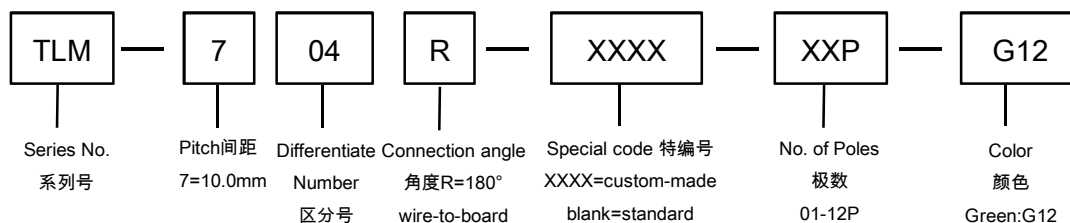

Web: [www.tielee.com/www.china-tianli.com/](http://www.tielee.com/www.china-tianli.com/) TEL: +86-574-6347-9600,6389-6436 Mail : [sale@china-tianli.cn](mailto:sale@china-tianli.cn)

地址: 中国浙江省宁波杭州湾新区庵东工业园区纬三路138号

ADD : 138 , Weisan Rd., Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China