




FILE: TLP\007\TLPS-007-XXP-X

REV	E.C.N NO.	CONTENT	CHK	DATE
V2.0	S2204021	Reposition the logo	SK	2022.05.03

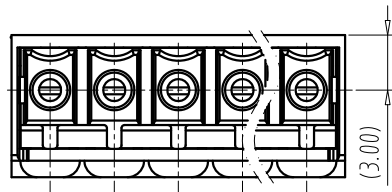

2P-7P 有凸台 (With rising point)

8P-24P 无凸台 (No rising point)

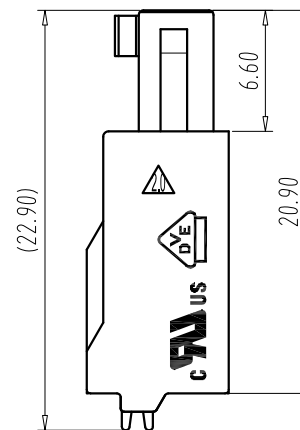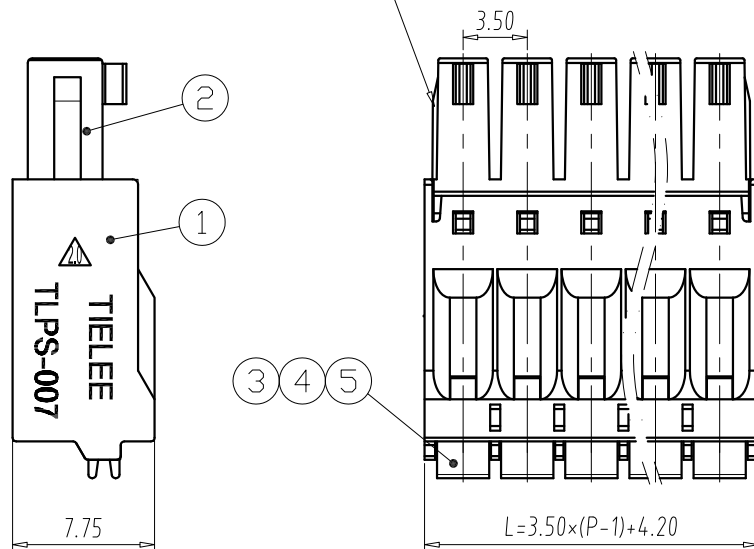

NOTES:

1. UL:

Rating:300V, 8A;

Insulation Withstands Voltage:AC1600V/1MIN;

Suitable Electric Wire:28AWG~16AWG

Using Temperature Range:-40℃~+115℃;

2. IEC:

Rating:160V, 10A;

Rate Impulse Voltage:2500V;

Insulation Resistance:500MΩ or more at DC500V;

Contact Resistance: ≤5mΩ

Material Group: I ;

Pollution Degree:3;

Overvoltage Category:III;

Suitable Electric Wire:0.34mm²~1.5mm²

Using Temperature Range:-40℃~+120℃;

3.Strip length:9.5~10.5mm

4. RoHS compliance;

DIM	P	02	03	04	05	06	07	08	09	10	11	12	
L		7.7	11.2	14.7	18.2	21.7	25.2	28.7	32.2	35.7	39.2	42.7	
DIM	P	13	14	15	16	17	18	19	20	21	22	23	24
L		46.2	49.7	53.2	56.7	60.2	63.7	67.2	70.7	74.2	77.7	81.2	84.7
Total Pitch Tolerances in mm						Nominal dimension range in mm							
over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	300	350	400	450	500
to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	300	350	400	450	500	550
±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.85	±1.00	±0.25	±0.30	±0.35	±0.44	±0.55

5	SPRING	P	STAINLESS	/
4	CLAMP	P	Copper Alloy	Tin Plated
3	LEVER	P	POM	ORANGE
2	COVER	1	PA66	UL94 V-0
1	HOUSING	1	PA66	UL94 V-0
ITEM	NAME OF PART	Q'TY	MATERIAL	NOTE

DWG.	SK	DATE	2020.01.23	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	2.5 : 1	A4	
APP.		DATE		NAME			
TIANLI ELECTRICAL MACHINERY(NINGBO)CO.,LTD.				TLPS-007-XXP-X			
				DWGNO. TLDW-TLPS007XXPX			