

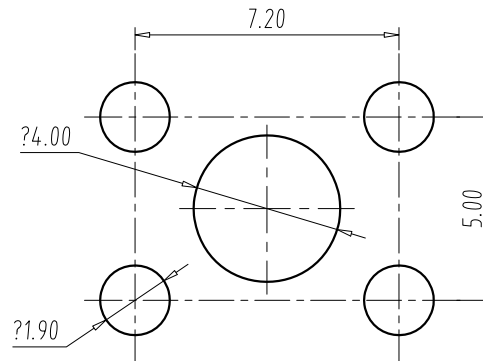
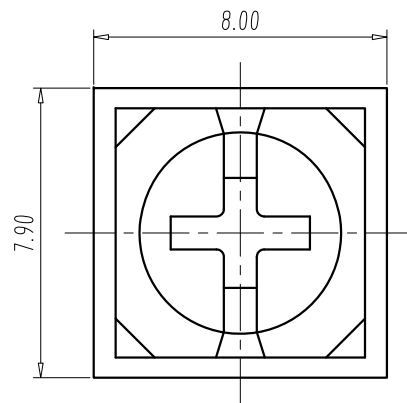


1. Rated current: 50A
2. Torque: 1.2Nm
3. Surface Treatment: Tin plated
4. Salt spray test: 48H
5. RoHS compliance

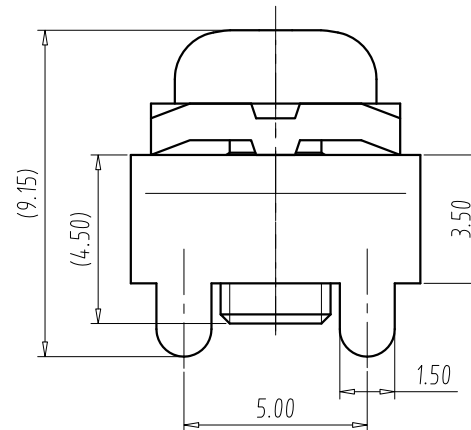

PCB 孔位尺寸
(PCB Hole Dimension)

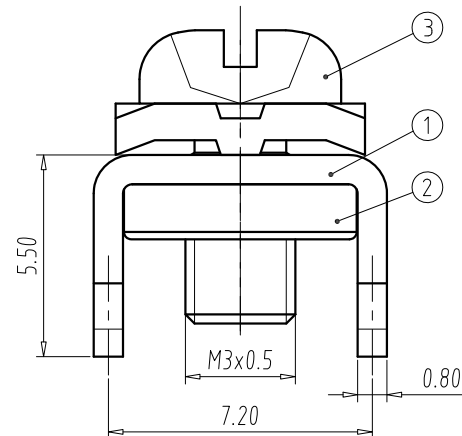

3	SCREW	1	STEEL	Zn&Ni Plated
2	Nut	1	STAINLESS STEEL	/
1	Solder Pin	1	COPPER ALLOY	Tin Plated
ITEM	NAME OF PART	Q"TY	MATERIAL	NOTE

DWG.	LF	DATE	2023.05.20	UNITS	MM	SHEET/OF	1/1	A
CHK.		DATE		SCALE	5 : 1	A4		
APP.		DATE		NAME	SA-0005			
 TIANLI ELECTRICAL MACHINERY(NINGBO)CO. LTD.				DWGNO	TLDW-SA0005			

Total Pitch Tolerances in mm									Nominal dimension range in mm							
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250
±0.20	±0.25	±0.3	±0.35	±0.4	±0.55	±0.70	±0.85	±1.00	±0.25	±0.30	±0.35	±0.4	±0.55	±0.70	±0.80	±0.90