
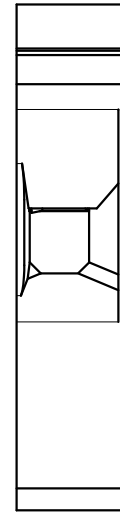
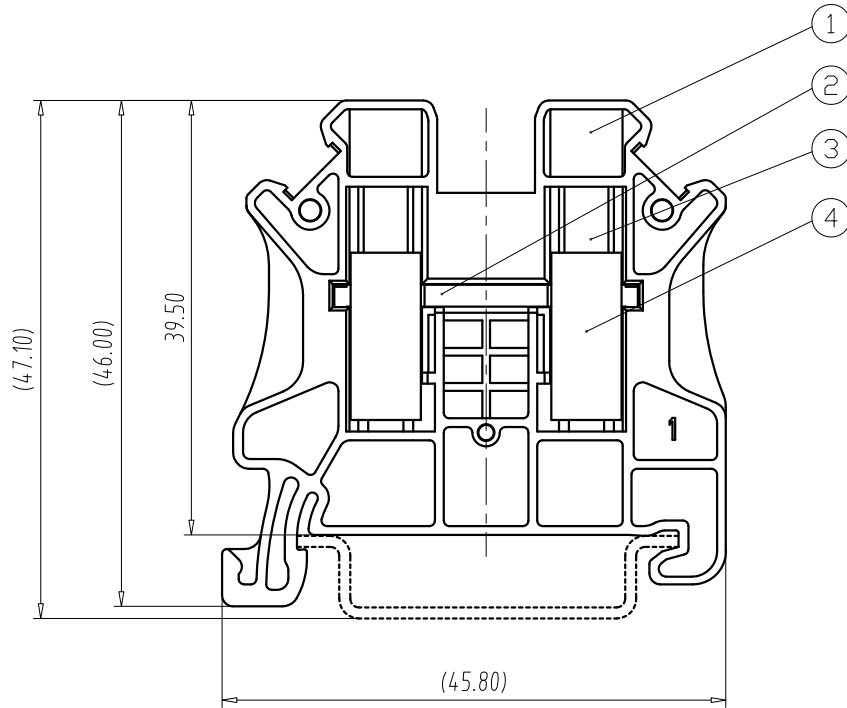


REV	E.C.N NO.	CONTENT	CHK	DATE
V1.0		ORIGINAL	ZX	2024.06.20

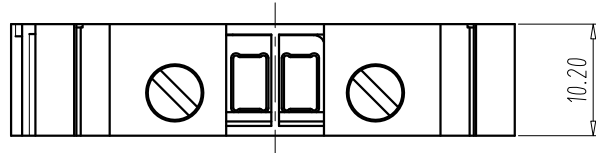

NOTES:

- IEC:
 - Rating:1000V, 57A;
 - Rate Impulse Voltage:8000V;
 - Insulation Resistance:500MΩ or more at DC500V;
 - Contact Resistance: ≤5mΩ
 - Material Group: I ;
 - Pollution Degree:3;
 - Overtoltage Category:III;
 - Suitable Electric Wire:0.5mm²~10mm²&16mm² (SOL)
- UL:
 - Rating:600V, 65A;
 - Insulation Withstands Voltage:AC2200V/MIN;
 - Suitable Electric Wire:20AWG~6AWG
- Using Temperature Range:-40℃~+115℃;
- Screw Torque Value:1.2N·m
- Strip length:10.0mm
- RoHS compliance;

TK10(X S)

- Slot screw
- Color:
 - M19:Grey
 - L01:Blue
 - R03:Red
 - K:Black
 -

4	BLOCK	2	Copper Alloy	M4/Ni Plated
3	SCREW	2	STEEL	M4/Zn Plated
2	CURRENT CARRIER	1	Copper Alloy	Tin Plated
1	HOUSING	1	PA66	UL94 V-0
ITEM	NAME OF PART	Q'TY	MATERIAL	NOTE

Total Pitch Tolerances in mm									Nominal dimension range in mm									
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	
±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.85	±1.00	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	±1.20	

DWG.	ZY	DATE	2020.07.10	UNITS	MM	SHEET/OF	1/1								
CHK.		DATE		SCALE	15 : 1	A4									
APP.		DATE		<table border="1"> <tr> <td>NAME</td> <td colspan="3">TK10(XS)</td> </tr> <tr> <td>DWGNO.</td> <td colspan="3">TLDW-TK10XS</td> </tr> </table>				NAME	TK10(XS)			DWGNO.	TLDW-TK10XS		
NAME	TK10(XS)														
DWGNO.	TLDW-TK10XS														
 TIANLI ELECTRICAL MACHINERY(NINGBO)CO.,LTD.															