
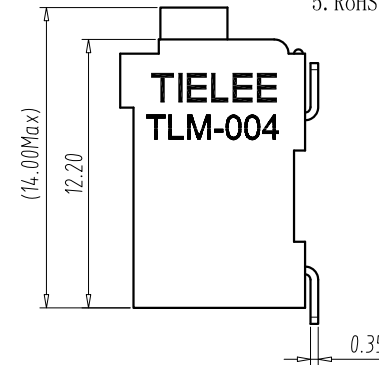
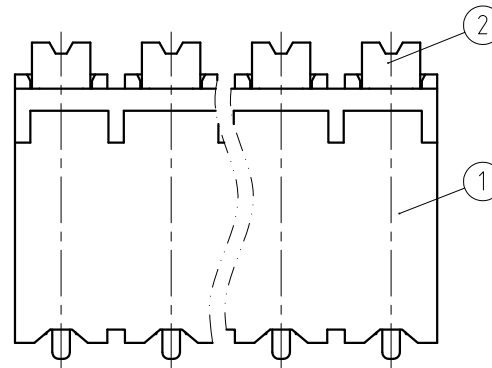
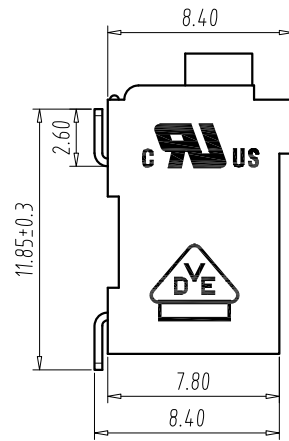
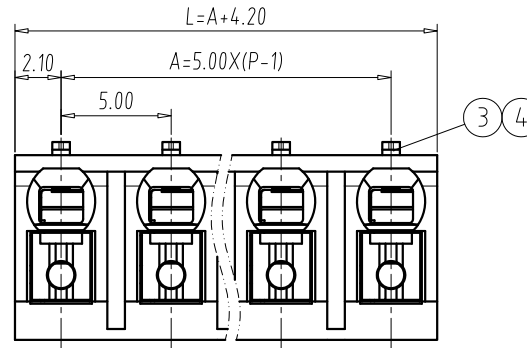


FILE: TLM004\TLM-004RS-5.00-XXP-X

| REV | E.C.N NO. | CONTENT | CHK | DATE |
|------|-----------|----------|-----|------------|
| V1.0 | | ORIGINAL | YHZ | 2022.06.10 |

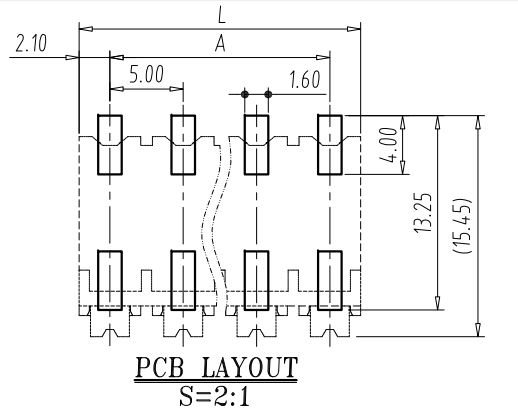

NOTES:

- UL:
 - Rating:300V, 12A
 - Insulation Withstands Voltage:AC1600V/MIN
 - Suitable Electric Wire:28AWG~16AWG
- IEC:
 - Rating:320V, 17.5A
 - Rate Impulse Voltage:4000V
 - Insulation Resistance:500MΩ or more at DC500V
 - Contact Resistance:≤5mΩ
 - Material Group: I
 - Pollution Degree:2
 - Overvoltage Category:III
 - Suitable Electric Wire:0.2mm²~1.5mm²
- Using Temperature Range:-40℃~+130℃
- Strip length:8.0~9.0mm
- RoHS compliance

| DIM | P | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | |
|-----|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| A | | 5.00 | 10.00 | 15.00 | 20.00 | 25.00 | 30.00 | 35.00 | 40.00 | 45.00 | 50.00 | 55.00 | |
| L | | 9.20 | 14.2 | 19.2 | 24.2 | 29.2 | 34.2 | 39.2 | 44.2 | 49.2 | 54.2 | 59.2 | |
| DIM | P | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 |
| A | | 60.00 | 65.00 | 70.00 | 75.00 | 80.00 | 85.00 | 90.00 | 95.00 | 100.0 | 105.0 | 110.0 | 115.0 |
| L | | 64.2 | 69.2 | 74.2 | 79.2 | 84.2 | 89.2 | 94.2 | 99.2 | 104.2 | 109.2 | 114.2 | 119.2 |

| Total Pitch Tolerances in mm | | | | | | | | | | | | | | | | Nominal dimension range in mm | | | | | | | | | | | | | | | |
|------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------------------------------|-------|------|------|------|------|------|------|------|------|------|------|------|------|--|--|
| over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | | |
| 0 | 30 | 53 | 70 | 90 | 115 | 150 | 200 | 250 | 0 | 30 | 53 | 70 | 90 | 115 | 150 | 200 | 250 | 320 | 30 | 53 | 70 | 90 | 115 | 150 | 200 | 250 | 320 | 320 | | | |
| ±0.20 | ±0.25 | ±0.30 | ±0.35 | ±0.44 | ±0.55 | ±0.70 | ±0.85 | ±1.00 | ±0.25 | ±0.30 | ±0.35 | ±0.44 | ±0.55 | ±0.70 | ±0.80 | ±0.90 | ±1.20 | | | | | | | | | | | | | | |

| 4 | SOLDER PIN | P | H-Copper Alloy | Tin Plated |
|------|--------------|------|----------------|------------|
| 3 | SPRING | P | Stainless | / |
| 2 | LEVER | P | PA-HT | UL94 V-0 |
| 1 | HOUSING | 1 | PA-HT | UL94 V-0 |
| ITEM | NAME OF PART | Q'TY | MATERIAL | NOTE |

| | | | | | | | |
|------|-----|------|------------|---|-----------------------|----------|-----|
| DWG. | YHZ | DATE | 2021.10.20 | UNITS | MM | SHEET/OF | 1/1 |
| CHK. | | DATE | | SCALE | 3 : 1 | A4 | |
| APP. | | DATE | | NAME TLM-004RS-5.00-XXP-X | | | |
| | | | | TIANLI ELECTRICAL MACHINERY(NINGBO)CO.,LTD. | | | |
| | | | | DWGNO. | TLDW-TLM004RS5.00XXPX | | |