
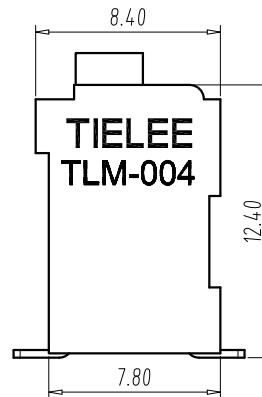
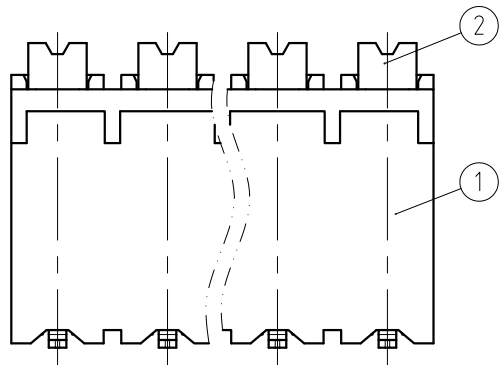
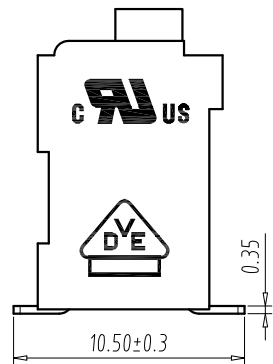
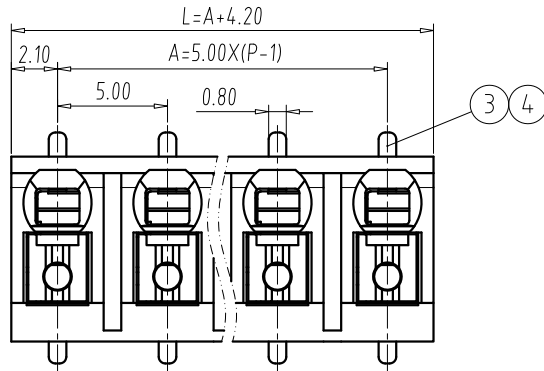


FILE: TLM004\TLM-004VS-5.00-XXP-X

REV	E.C.N NO.	CONTENT	CHK	DATE
V1.0		ORIGINAL	YHZ	2022.06.08

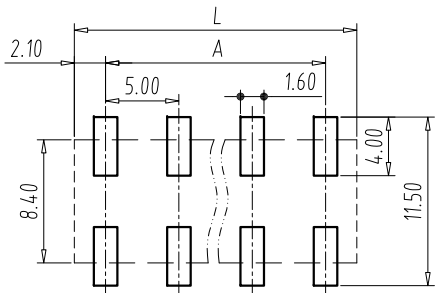

NOTES:

- UL:
 - Rating:300V, 12A;
 - Insulation Withstands Voltage:AC1600V/MIN;
 - Suitable Electric Wire:28AWG~16AWG
- IEC:
 - Rating:320V, 17.5A;
 - Rate Impulse Voltage:4000V;
 - Insulation Resistance:500MΩ or more at DC500V;
 - Contact Resistance: ≤5mΩ
 - Material Group:I;
 - Pollution Degree:2;
 - Overvoltage Category:III;
 - Suitable Electric Wire:0.2mm²~1.5mm²
- Using Temperature Range:-40°C~+130°C;
- Strip length:8.0~9.0mm
- RoHS compliance;

DIM	P	2	3	4	5	6	7	8	9	10	11	12	
A		5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	
L		9.20	14.2	19.2	24.2	29.2	34.2	39.2	44.2	49.2	54.2	59.2	
DIM	P	13	14	15	16	17	18	19	20	21	22	23	24
A		60.00	65.00	70.00	75.00	80.00	85.00	90.00	95.00	100.0	105.0	110.0	115.0
L		64.2	69.2	74.2	79.2	84.2	89.2	94.2	99.2	104.2	109.2	114.2	119.2

Total Pitch Tolerances in mm										Nominal dimension range in mm									
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	300	0	30	53	70	90	115	150	200	250	320
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320		30	53	70	90	115	150	200	250	320	
±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.85	±1.00	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	±1.20		

4	SOLDER PIN	P	H-Copper Alloy	Tin Plated
3	SPRING	P	Stainless	/
2	LEVER	P	PA-HT	UL94 V-0
1	HOUSING	1	PA-HT	UL94 V-0
ITEM	NAME OF PART	Q'TY	MATERIAL	NOTE

DWG.	YHZ	DATE	2022.06.08	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	3:1	A4	
APP.		DATE		NAME TLM-004VS-5.00-XXP-X DWGNO. TLDW-TLM004VS5.00XXPX			
TIANLI ELECTRICAL MACHINERY(NINGBO)CO.,LTD.							