

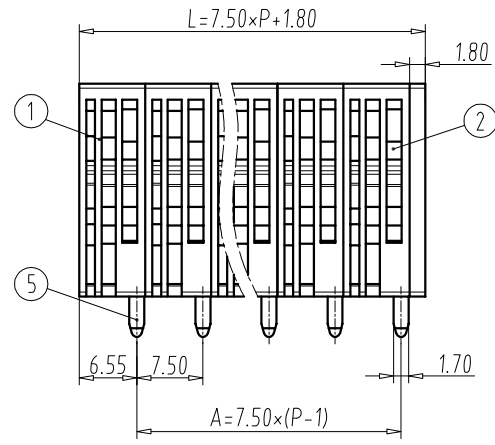


REV	E.C.N NO.	CONTENT	CHK	DATE
V0.0		Set the change LOGO	ZHT	2021.03.22

- NOTES:**
- UL:
 - Rating:600V, 36A
 - Insulation Withstands Voltage:AC2200V/MIN
 - Suitable Electric Wire:24AWG~8AWG
 - IEC:
 - Rating:1000V, 41A
 - Rate Impulse Voltage:8000V
 - Insulation Resistance:500MΩ or more at DC500V
 - Contact Resistance: ≤5mΩ
 - Material Group: I
 - Pollution Degree: 2
 - Overvoltage Category: III
 - Suitable Electric Wire:0.2mm²~6mm²/10mm² (Sol)
 - Using Temperature Range:-40℃~+105℃
 - Strip length:15mm
 - RoHS compliance

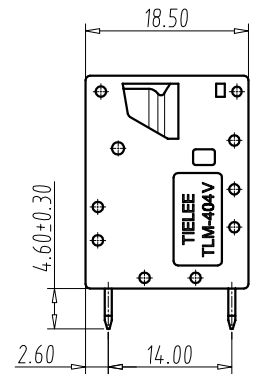

DIM	P	02	03	04	05	06	07	08
L		16.80	24.30	31.80	39.30	46.80	54.30	61.80
A		7.50	15.00	22.50	30.00	37.50	45.00	52.50

DIM	P	09	10	11	12	13	14	15	16
L		69.30	76.80	84.30	91.80	99.30	114.3	121.8	129.3
A		60.00	67.50	75.00	82.50	90.00	105.0	112.5	120.0

Total Pitch Tolerances in mm								Nominal dimension range in mm							
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	320	30	53	70	90	115	150	200	250
±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.85	±1.00	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80

6	SPRING COIL	P	STAINLESS STEEL	/
5	SOLDER PIN-2	IP-1/2 or P/2	Copper Alloy	Sn Plated
4	SOLDER PIN-1	IP-1/2 or P/2	Copper Alloy	Sn Plated
3	COVER	1	PA66	UL94V-0
2	HOUSING-2	P-1	PA66	UL94V-0
1	HOUSING-1	1	PA66	UL94V-0

DWG.	CZM	DATE	2020.10.22	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	125 : 1	A4	
APP.		DATE		NAME TLM-404VA-XXP-X			
 ELECTRICAL MACHINERY (NINGBO) CO., LTD.				DWGNO	TLDW-TLM404VAXXPX		