






REV	E.C.N NO.	CONTENT	CHK	DATE
V1.0		ORIGINAL	NJL	2022.01.18

NOTES:

- UL:
 - Rating: 300V, 12A;
 - Insulation Withstands Voltage: AC1600V/MIN;
 - Suitable Electric Wire: 26AWG~12AWG
- IEC:
 - Rating: 630V, 17A;
 - Rate Impulse Voltage: 4000V;
 - Insulation Resistance: 500MΩ or more at DC500V;
 - Contact Resistance: ≤5mΩ
 - Material Group: I;
 - Pollution Degree: 2;
 - Overvoltage Category: II;
 - Suitable Electric Wire: 0.2mm²~2.5mm²
- Using Temperature Range: -40℃~+115℃;
- Strip length: 9.0~10.0mm
- RoHS compliance;



2P

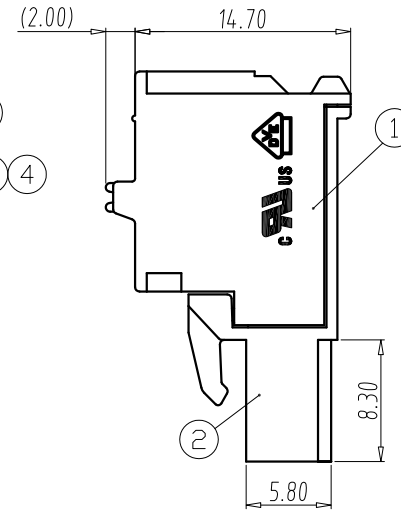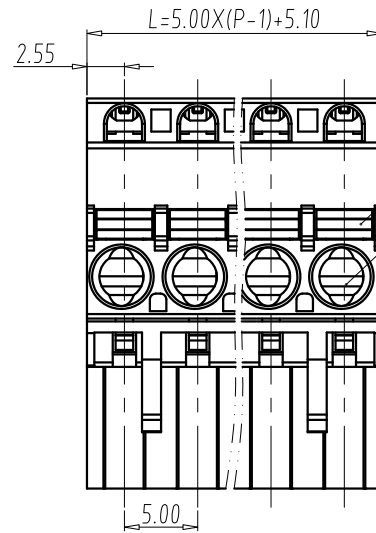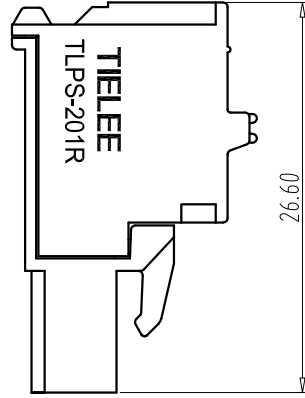

DIM	P	2	3	4	5	6	7	8	9	10	11	12	13
L		10.10	15.10	20.10	25.10	30.10	35.10	40.10	45.10	50.10	55.10	60.10	65.10
DIM	P	14	15	16	17	18	19	20	21	22	23	24	
L		70.10	75.10	80.10	85.10	90.10	95.10	100.10	105.10	110.10	115.10	120.10	

Total Pitch Tolerances in mm								Nominal dimension range in mm									
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	300	350	400	450	500	550	600	650	700
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	300	350	400	450	500	550	600	650	700	750
±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±1.00	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	±1.20	

5	LEVER	P	PBT	UL94-V0
4	SPRING	P	STAINLESS STEEL	
3	CLAMP	P	COPPER ALLOY	TIN PLATED
2	COVER	1	PA66	UL94-V0
1	HOUSING	1	PA66	UL94-V0
ITEM	NAME OF PART	Q'TY	MATERIAL	NOTE

DWG.	NJL	DATE	2020.08.28	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	2:1	A4	
APP.		DATE		NAME TLPS-201R-XXP-X DWGNO. TL-02-TLPS201RXXPX			
TIANLI ELECTRICAL MACHINERY(NINGBO)CO.,LTD.							