
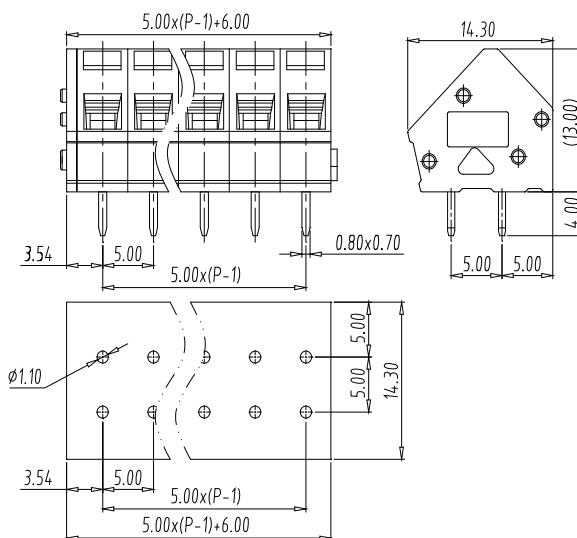


PCB terminal block — TLM series (Screwless Type) — TLM-203

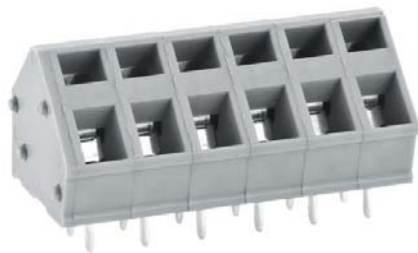

■ 图示(Pic. shown) : TLM-203-06P-M19

General: PCB terminal block Rated :320V,24A 2.5mm²
Single row, 5.00mm pitch, 01 ~ 24 Pole
Wiring orientation:135°(wire-to-board)
Screwless Type

认证 (Approval) :



■ 技术参数Technical Data	UL standard			IEC standard		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	--	300V	--	320V	--
额定电流(Rated current)	15A	--	10A	--	24A	--
额定连接容量(Rated connection capacity)	22AWG ~ 12AWG			0.34mm ² ~2.5mm ²		
刚性导线横截面 (AWG) (Conductor cross section,solid)	22 ~ 12					
柔性导线横截面 (AWG) (Conductor cross section,stranded)	22 ~ 12					
刚性导线横截面 (mm2) (Conductor cross section,rigid)	0.34 ~ 2.5					
柔性导线横截面 (mm2) (Conductor cross section,flexible)	0.34 ~ 2.5					
柔性导线横截面, 不带绝缘套管的冷压头(mm2) (Conductor cross section flexible , with ferrule without plastic	0.34 ~ 1.5					
柔性导线横截面, 带绝缘套管的冷压头(mm2) (Conductor cross section flexible , with ferrule with plastic sleeve)	0.34 ~ 1.5					
2根具有相同横截面的导线,柔性,带TWIN套管及塑料套管(mm2) (2 conductors with the same section flexible with TWIN ferrule and plastic sleeve)	--					
绝缘材料(Insulation Material)	PA66 UL94 V-0					
绝缘材料组别(Material group)	I					
电流承载部件材料和镀层(Material & Plating of Current carrier)	Copper alloy , Tin plated					
接线弹片材料(Material of Clamp spring)	Stainless Steel (GrNi)					
耐电压(1分钟)(Withstanding Voltage/1Min)	AC1600V					
额定冲击电压(Rated surge voltage)	4KV					
接线螺丝(Wire clamp unit Screw), 最大扭矩(torque Max.)	--					
固定螺丝(Mounting Screw), 扭矩(torque)	--					
剥线长度(Wire stripping length)	5 ~ 6mm					
使用温度(Operating temperature)	-40°C up to +120°C(IEC)/-40°C up to +105°C(UL)					
存储温度(Storage temperature)	-40°C up to +70°C					
存储相对湿度(Storage relative humidity)	≤70%					
焊接方式(Soldering recommend)	Wave soldering ,260°C 5S Max (Single Wave) , 260°C 10S Max(Double Wave)					

■ 订购方式(How to order)

