


PCB terminal block — TL series(Raising Clamp)—TL236R

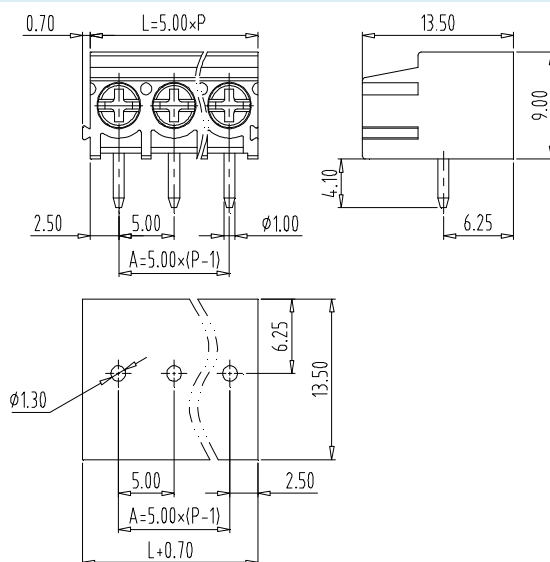

■ 图示(Pic. shown) : TL236R-05P-G12C


General. PCB terminal block Rated :320V,32A , 4.0mm²

Single row , 5.00mm pitch , 02P-24P Pole

Wiring orientation: 90°(wire-to-board)

Screw clamp unit: M3, 0.5Nm

认证 (Approval)



■ 技术参数Technical Data

■ 技术参数Technical Data	UL standard			IEC standard		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	--	300V	250V	320V	630V
额定电流(Rated current)	20A	--	10A	32A	32A	32A
额定连接容量(Rated connection capacity)	20~12AWG			0.5~4.0mm ²		
刚性导线横截面 (AWG) (Conductor cross section,solid)				20~12		
柔性导线横截面 (AWG) (Conductor cross section,stranded)				20~12		
刚性导线横截面 (mm2) (Conductor cross section,rigid)				0.5~4.0		
柔性导线横截面 (mm2) (Conductor cross section,flexible)				0.5~4.0		
柔性导线横截面 , 不带绝缘套管的冷压头(mm2) (Conductor cross section flexible , with ferrule without plastic				0.5~2.5		
柔性导线横截面 , 带绝缘套管的冷压头 (mm2) (Conductor cross section flexible , with ferrule with plastic sleeve)				0.5~2.5		
2根具有相同横截面的导线 , 柔性 , 带TWIN套管及塑料套管 (mm2) (2 conductors with the same section flexible with TWIN ferrule				0.5~1.5		
绝缘材料(Insulation Material)				PA66 UL94 V-0		
绝缘材料组别(Material group)				I		
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper alloy , Tin plated		
接线弹片材料(Material of Clamp spring)				--		
耐电压(1分钟)(Withstanding Voltage/1Min)				1600V		
额定冲击电压(Rated surge voltage)				4KV		
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)				M3 , 0.5Nm		
固定螺丝(Mounting Screw) , 扭矩(torque)				--		
剥线长度(Wire stripping length)				6.5mm		
使用温度(Operating temperature)				-40°C up to +115°C		
存储温度(Storage temperature)				-40°C up to +70°C		
存储相对湿度(Storage relative humidity)				≤70%		
焊接方式(Soldering recommend)		Wave soldering ,260°C 5S Max (Single Wave) , 260°C 10S Max(Double Wave)				

■ 订购方式(How to order)

TL	2	36	R	XXXX	XXP	G12	C
Series No. 系列号	Pitch间距 2=5.00mm	Differentiate Number 区分号	Connection angle 角度R=90° wire-to-board	Special code 特编号 XXXX=custom-made blank=standard	No. of Poles 极数 02-24P	Color 颜色 Green: G12	Screw Type 螺丝S=Slot C=Cross

Web:www.tielee.com TEL:+86-574-6347-9600,6389-6436 Mail : sale@china-tianli.cn

地址:中国浙江省宁波杭州湾新区庵东工业园区纬三路138号

ADD : 138 , Weisan Rd.,Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China