


PCB terminal block — TL series (Raising Clamp)— TL804

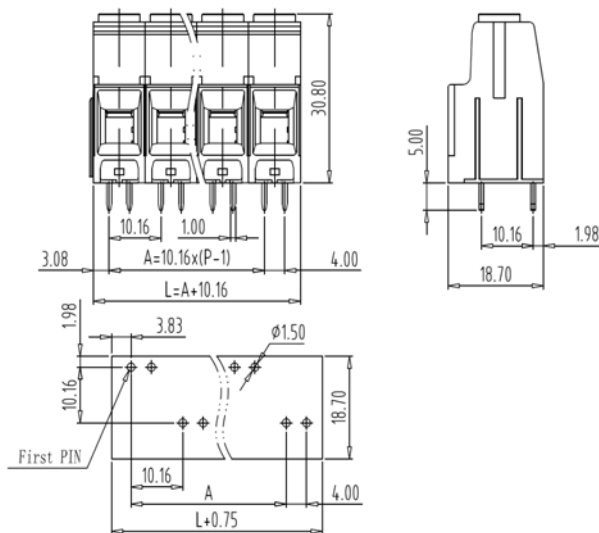

■ 图示(Pic. shown) : TL804-02P-G12S

General.

PCB terminal block Rated :1000V,76A , 16.0mm²

Single row , 10.16mm pitch , 02-16 Pole

Wiring orientation: 180°(wire-to-board)

Screw clamp unit: M4, 1.5Nm

认证 (Approval) :



■ 技术参数Technical Data

UL应用组别(UL Application group) IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	600V	600V	600V	1000V	630V	--
额定电流(Rated current)	65A	65A	5A	76A	76A	--
额定连接容量(Rated connection capacity)	20-6AWG Sol&Str			0.5-16.0mm²		
刚性导线横截面 (AWG) (Conductor cross section,solid)				20~6		
柔性导线横截面 (AWG) (Conductor cross section,stranded)				20~6		
刚性导线横截面 (mm2) (Conductor cross section,rigid)				0.5~16		
柔性导线横截面 (mm2) (Conductor cross section,flexible)				0.5~16		
柔性导线横截面，不带绝缘套管的冷压头(mm2) (Conductor cross section flexible，with ferrule without plastic				0.5~16		
柔性导线横截面，带绝缘套管的冷压头(mm2) (Conductor cross section flexible，with ferrule with plastic sleeve)				0.5~16		
2根具有相同横截面的导线，柔性，带TWIN套管及塑料套管(mm2) (2 conductors with the same section flexible with TWIN ferrule and plastic sleeve)				0.5~6		
绝缘材料(Insulation Material)				PA66 UL94 V-0		
绝缘材料组别(Material group)				I		
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper alloy ，Tin plated		
接线弹片材料(Material of Clamp spring)				--		
耐电压(1分钟)(Withstanding Voltage/1Min)				2200V		
额定冲击电压(Rated surge voltage)				8000V		
接线螺丝(Wire clamp unit Screw)，最大扭矩(torque Max.)				M4, 1.5		
固定螺丝(Mounting Screw)，扭矩(torque)				--		
剥线长度(Wire stripping length)				10.0~11.0 mm		
使用温度(Operating temperature)				-40°C up to +115°C		
存储温度(Storage temperature)				-40°C up to +70°C		
存储相对湿度(Storage relative humidity)				≤70%		
焊接方式(Soldering recommend)	Wave soldering ,260°C 5S Max (Single Wave) , 260°C 10S Max(Double Wave)					

■ 订购方式(How to order)

