
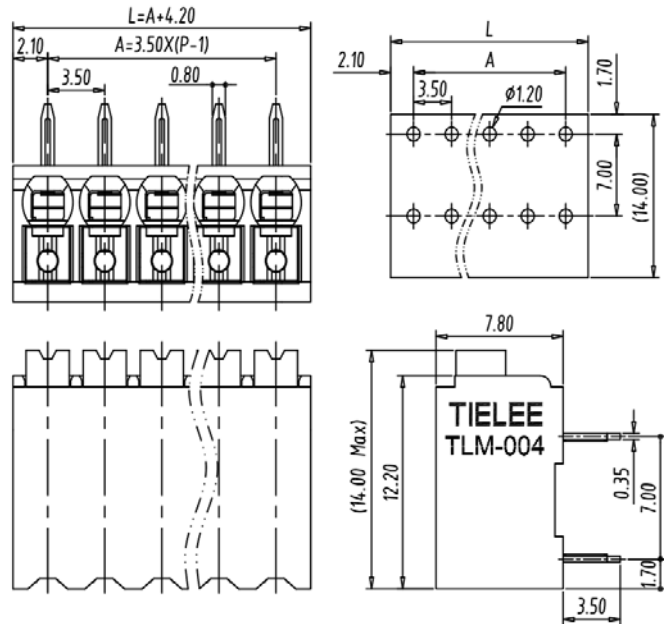


PCB terminal block — TLM series (Screwless Type) — TLM-004NRT-3.50

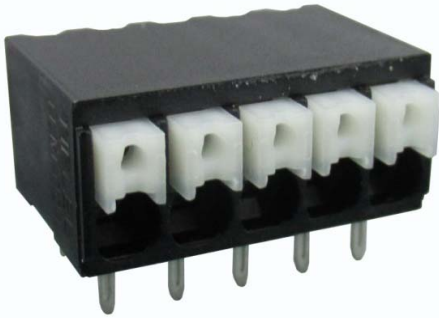

■ 图示 (Pic. shown): TLM-004NRT-3.50-05P-K

General.	PCB terminal block	Rated : 160V, 17.5A 1.5mm ²
	Single row , 3.50mm pitch ,	02-24 Pole
	Wiring orientation: 180° (wire-to-board)	
	Screwless Type	

认证 (Approval)



技术参数 Technical Data	UL standard			IEC standard		
UL应用组别 (UL Application group)	UL Application group			IEC过电压别/污染等级 (IEC overvoltage category / pollution degree)		
IEC过电压别/污染等级 (IEC overvoltage / pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压 (Rated voltage)	300V	--	300V	160V	160V	320V
额定电流 (Rated current)	12A	--	10A	17.5A	17.5A	17.5A
额定连接容量 (Rated connection capacity)	28-16AWG Sol&Str			0.2~1.5mm ² Sol&Str		
绝缘材料 (Insulation Material)				PA-HT UL94 V-0		
电流承载部件材料和镀层 (Material & Plating of Current)				H-Copper alloy , Tin plated		
接线弹片材料 (Material of Clamp spring)				Stainless		
绝缘电阻 (Insulation Resistance)				500MΩ or more at DC500V		
耐电压 (1分钟) (Withstanding Voltage/1Min)				1600V		
额定冲击电压 (Rated surge voltage)				2500V		
接线螺丝 (Wire clamp unit Screw), 最大扭矩 (torque Max.)				--		
固定螺丝 (Mounting Screw), 扭矩 (torque)				--		
剥线长度 (Wire stripping length)				8.0-9.0mm		
使用温度 (Operating temperature)				-40° C up to +130° C		
焊接方式 (Soldering recommend)				Reflow soldering , 260° C 10S Max		

■ 订购方式 (How to order)

TLM	—	004		N		R		T	—	3.50	—	XXXX	—	XXP	—	X
Series No. 系列号		Differentiate Number 区分号		narrow base 主体窄型		Connection angle 角度 V=180° wire-to-board		Through hole reflow		Pitch间距 3.50mm		Special code 特编 号 XXXX=custom-made blank=standard		No. of Poles 极数 02-24P		Color 颜色 Black:K

Web: www.tielee.com/www.china-tianli.com/ TEL: +86-574-6347-9600, 6389-6436 Mail: sale@china-tianli.cn

地址: 中国浙江省宁波杭州湾新区庵东工业园区纬三路138号

ADD: 138, Weisan Rd., Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China