
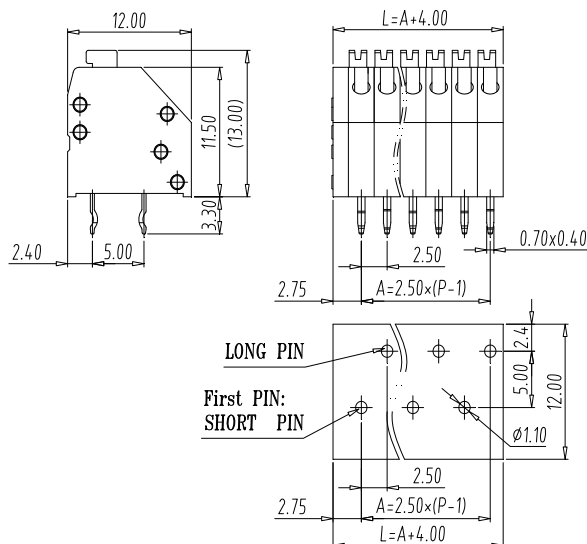


PCB terminal block — TLM series (Screwless Type) — TLM-250D



■ 图示(Pic. shown) : TLM-250D-06P-M19

General.	PCB terminal block	Rated :250V,2A 0.5mm ²
	Single row , 2.50mm pitch , 02 ~ 24 Pole	
	Wiring orientation:135°(wire-to-board)	
	Screwless Type	

认证 (Approval) :



■ 技术参数Technical Data		UL standard			IEC standard		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)			
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2	
额定电压(Rated voltage)	250V	--	250V	--	250V	--	
额定电流(Rated current)	2A	--	2A	--	2A	--	
额定连接容量(Rated connection capacity)	20AWG			0.2mm²~0.5mm²			
刚性导线横截面 (AWG) (Conductor cross section,solid)				20			
柔性导线横截面 (AWG) (Conductor cross section,stranded)				20			
刚性导线横截面 (mm2) (Conductor cross section,rigid)				0.2 ~ 0.5			
柔性导线横截面 (mm2) (Conductor cross section,flexible)				0.2 ~ 0.5			
柔性导线横截面，不带绝缘套管的冷压头(mm2) (Conductor cross section flexible，with ferrule without plastic				--			
柔性导线横截面，带绝缘套管的冷压头(mm2) (Conductor cross section flexible，with ferrule with plastic sleeve)				--			
2根具有相同横截面的导线,柔性,带TWIN套管及塑料套管(mm2) (2 conductors with the same section flexible with TWIN ferrule and plastic sleeve)				--			
绝缘材料(Insulation Material)				PA66 UL94 V-0			
绝缘材料组别(Material group)				I			
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper alloy ，Tin plated			
接线弹片材料(Material of Clamp spring)				--			
耐电压(1分钟)(Withstanding Voltage/1Min)				AC1500V			
额定冲击电压(Rated surge voltage)				4KV			
接线螺丝(Wire clamp unit Screw)，最大扭矩(torque Max.)				--			
固定螺丝(Mounting Screw)，扭矩(torque)				--			
剥线长度(Wire stripping length)				8 ~ 9mm			
使用温度(Operating temperature)				-40°C up to +105°C			
存储温度(Storage temperature)				-40°C up to +70°C			
存储相对湿度(Storage relative humidity)				≤70%			
焊接方式(Soldering recommend)		Wave soldering ,260°C 5S Max (Single Wave) , 260°C 10S Max(Double Wave)					

■ 订购方式(How to order)

