


PCB Connector — TLP series (Pin header)— TLPHC-004

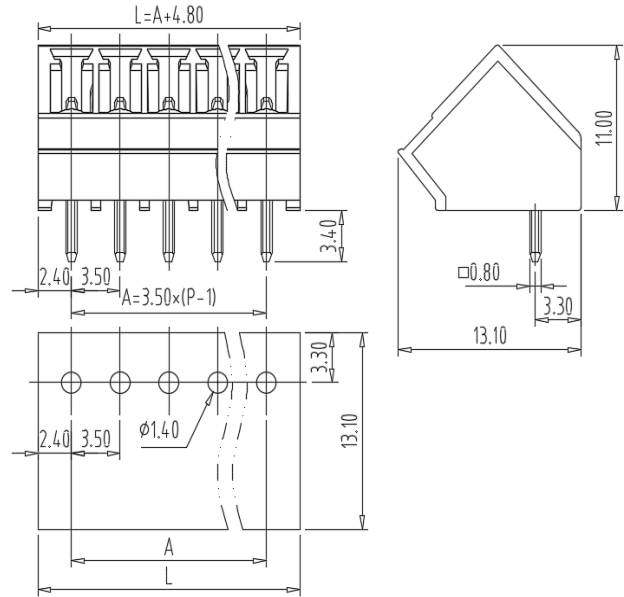

■ 图示(Pic. shown) : TLPHC-004-03P-G12

General.

PCB Connector Rated : 160V,10A
Single row , 3.50mm pitch , 02-24 Pole
Orientation:135°(plug-in to board)


认证 (Approval) :



■ 技术参数Technical Data

UL应用组别(UL Application group) IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
	B	C	D			
				III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	--	300V	--	160V	--
额定电流(Rated current)	10A	--	10A	--	10A	--
额定连接容量(Rated connection capacity)	--			--		
绝缘材料(Insulation Material)		PA66 UL94 V-0				
绝缘材料组别(Material group)		I				
电流承载部件材料和镀层(Material & Plating of Current carrier)		Copper alloy , Tin plated				
接线弹片材料(Material of Clamp spring)		--				
耐电压(1分钟)(Withstanding Voltage/1Min)		1600V				
额定冲击电压(Rated surge voltage)		2500V				
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)		--				
固定螺丝(Mounting Screw) , 扭矩(torque)		--				
剥线长度(Wire stripping length)		--				
使用温度(Operating temperature)		-40°C up to +115°C(UL)&-40°C up to +120°C(IEC)				
存储温度(Storage temperature)		-40°C up to +70°C				
存储相对湿度(Storage relative humidity)		≤70%				
焊接方式(Soldering recommend)	Wave soldering ,260°C 8S Max					

■ 订购方式(How to order)

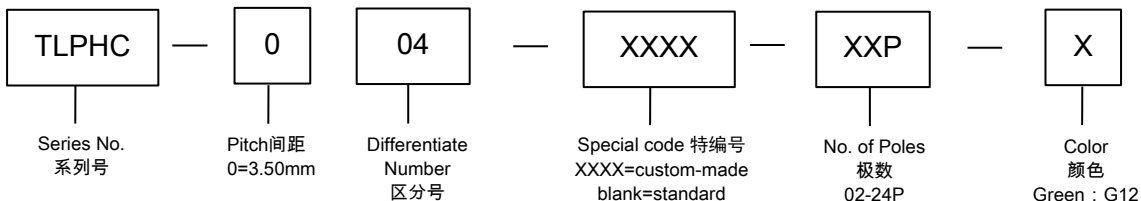

Web:www.tielee.com

TEL:+86-574-6347-9600,6389-6436

Mail : sale@china-tianli.cn

地址:中国浙江省宁波杭州湾新区庵东工业园区纬三路138号

ADD : 138 , Weisan Rd.,Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China

■ 编码片 Coding key



P/N:
TLPCK-001-S

■ 插头 (Female Connector) — single row



P/N : TLPS-001V
Wiring orientation :
180°(wire to plug-in)
Rated : 150V,10A , 1.5mm²
Screw clamp unit: M2.0 , 0.2Nm



P/N : TLPS-001R
Wiring orientation :
90°(wire to plug-in)
Rated : 150V,10A , 1.5mm²
Screw clamp unit: M2.0 , 0.2Nm

■ 插头 (Female Connector) — single row



P/N : TLPS-001RL
Wiring orientation :
270°(wire to plug-in)
Rated : 150V,10A , 1.5mm²
Screw clamp unit: M2.0 , 0.2Nm



P/N : TLPS-002V
Wiring orientation :
180°(wire to plug-in)
Rated : 160V,10A , 1.5mm²
Spring clamp unit.

■ 插头 (Female Connector) — single row



P/N : TLPS-007
Wiring orientation :
180°(wire to plug-in)
Rated : 160V,10A , 1.5mm²
Screw clamp unit: