


Terminal Strip — TLB series — TLB-100HW

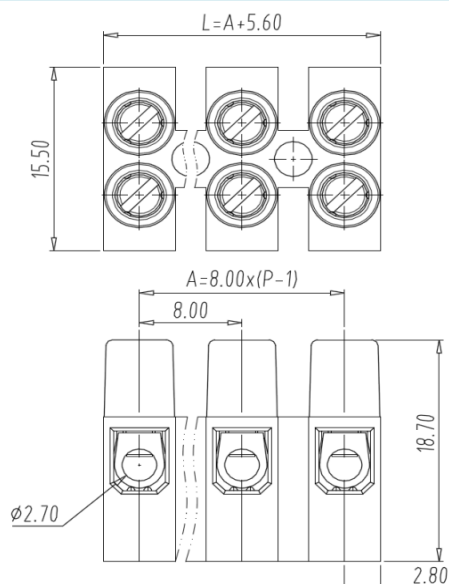

■ 图示(Pic. shown) : TLB-100HW-12P-TS

General: Terminal Strip Rated : 450V,32A , 2.5mm²
8.0mm pitch , 02-12 Pole
Wire-to-Wire Connection
Screw clamp unit: M2.5, 0.4Nm Max

认证 (Approval) :



技术参数 Technical Data	UL standard			IEC standard		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	150V	300V	--	450V	--
额定电流(Rated current)	20A	20A	10A	--	32A	--
额定连接容量(Rated connection capacity)	24~14AWG/12AWG Sol			0.75~2.5mm ²		
刚性导线横截面 (AWG) (Conductor cross section,solid)	24~12					
柔性导线横截面 (AWG) (Conductor cross section,stranded)	24~14					
刚性导线横截面 (mm2) (Conductor cross section,rigid)	0.75~2.5					
柔性导线横截面 (mm2) (Conductor cross section,flexible)	0.75~1.5					
绝缘材料(Insulation Material)	PA66 UL94 V-2					
绝缘材料组别(Material group)	I					
电流承载部件材料和镀层(Material & Plating of Current carrier)	Copper alloy , Ni plated					
接线弹片材料(Material of Clamp spring)	--					
耐电压(1分钟)(Withstanding Voltage/1Min)	1600V					
额定冲击电压(Rated surge voltage)	--					
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)	M2.5 , 0.4N.m Max					
固定螺丝(Mounting Screw) , 扭矩(torque)	--					
剥线长度(Wire stripping length)	5.0-5.5mm					
使用温度(Operating temperature)	-40°C up to +80°C(UL) /-40°C up to +100°C(IEC)					
存储温度(Storage temperature)	-40°C up to +70°C					
存储相对湿度(Storage relative humidity)	≤70%					
焊接方式(Soldering recommend)	--					

■ 订购方式(How to order)

TLB	1	00	H	W	XXXX	XXP	X	X
Series No. 系列号	Pitch间距 P=8.00mm	Differentiate Number 区分号	Higher base 加高型	With wire protector 弹片型	Special code 特编号 XXXX=custom-made blank=standard	No. of Poles 极数 02-12P	Color 颜色 Transparent: T	Screw Type 螺丝S=Slot C=Cross

Web:www.tielee.com TEL:+86-574-6347-9600,6389-6436 Mail : sale@china-tianli.cn

地址:中国浙江省宁波杭州湾新区庵东工业园区纬三路138号

ADD : 138 , Weisan Rd., Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China