


Terminal Strip — TLB series — TLB-400W

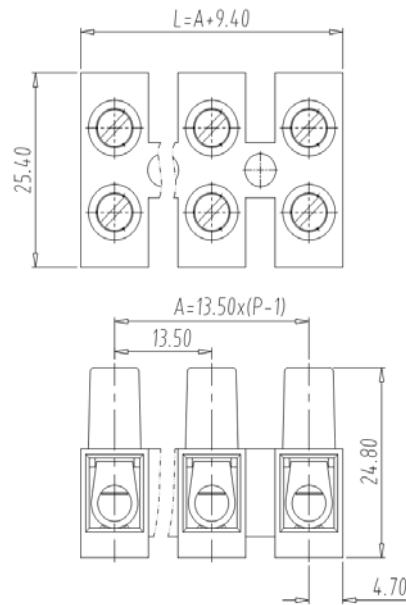

■ 图示(Pic. shown) : TLB-400W-12P-T01S

General. Terminal Strip Rated : 750V, 57A , 10mm²
13.5mm pitch , 02-12 Pole
Wire-to-Wire Connection
Screw clamp unit: M4, 1.2N.m Max

认证 (Approval) :



■ 技术参数 Technical Data

UL应用组别(UL Application group) IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	UL standard			IEC standard		
	B	C	D	IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
				III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	300V	300V	--	750V	--
额定电流(Rated current)	50A	50A	10A	--	57A	--
额定连接容量(Rated connection capacity)	20~8AWG			2.5~10mm ²		
刚性导线横截面 (AWG) (Conductor cross section,solid)	20~8			20~8		
柔性导线横截面 (AWG) (Conductor cross section,stranded)	20~8			20~8		
刚性导线横截面 (mm2) (Conductor cross section,rigid)	2.5~10mm ²			2.5~10mm ²		
柔性导线横截面 (mm2) (Conductor cross section,flexible)	2.5~10mm ²			2.5~10mm ²		
绝缘材料(Insulation Material)	PA66 UL94 V-2			PA66 UL94 V-2		
绝缘材料组别(Material group)	I			I		
电流承载部件材料和镀层(Material & Plating of Current carrier)	Copper alloy , Ni plated			Copper alloy , Ni plated		
接线弹片材料(Material of Clamp spring)	--			--		
耐电压(1分钟)(Withstanding Voltage/1Min)	1600V			1600V		
额定冲击电压(Rated surge voltage)	--			--		
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)	M4.0 , 1.2N.m Max			M4.0 , 1.2N.m Max		
固定螺丝(Mounting Screw) , 扭矩(torque)	--			--		
剥线长度(Wire stripping length)	8.0-9.0mm			8.0-9.0mm		
使用温度(Operating temperature)	-40°C up to +80°C(UL) /-40°C up to +100°C(IEC)			-40°C up to +80°C(UL) /-40°C up to +100°C(IEC)		
存储温度(Storage temperature)	-40°C up to +70°C			-40°C up to +70°C		
存储相对湿度(Storage relative humidity)	≤70%			≤70%		
焊接方式(Soldering recommend)	--			--		

■ 订购方式(How to order)

TLB	4	00	W	XXXX	XXP	X	X
Series No. 系列号	Pitch间距 P=13.50mm	Differentiate Number 区分号	With wire protector 弹片型	Special code 特编号 XXXX=custom-made blank=standard	No. of Poles 极数 02-12P	Color 颜色 Transparent: T01	Screw Type 螺丝S=Slot C=Cross