


Multi Connection System — TLC series (Pin header) — TLCH-500R

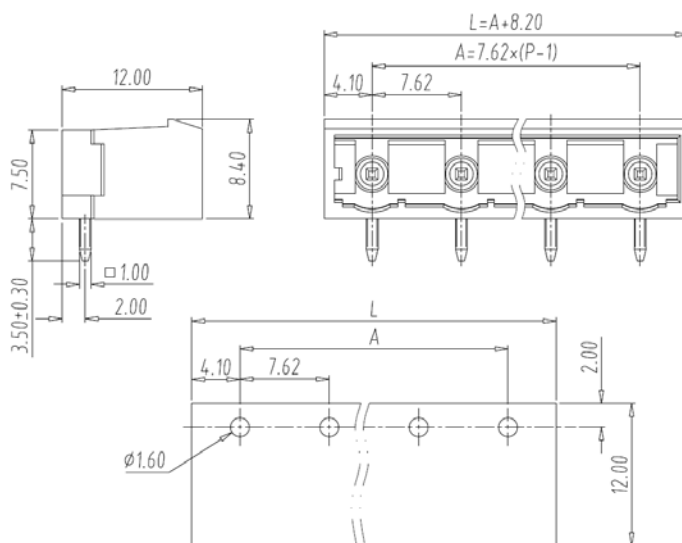

■ 图示(Pic. shown) : TLCH-500R-05P-M19

General.

Multi Connection System Rated : 630V,20A

Single row ,7.62mm pitch , 02-24 Pole

Orientation:180°(plug-in to board)

认证 (Approval) :



■ 技术参数Technical Data		UL standard			IEC standard		
UL应用组别(UL Application group)		UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		B	C	D			
额定电压(Rated voltage)		300V	150V	300V	400V	630V	630V
额定电流(Rated current)		16A	16A	10A	20A	20A	20A
额定连接容量(Rated connection capacity)		--			--		
绝缘材料(Insulation Material)				PA66 UL94 V-0			
绝缘材料组别(Material group)				I			
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper alloy , Tin plated			
接线弹片材料(Material of Clamp spring)				--			
耐电压(1分钟)(Withstanding Voltage/1Min)				1600V			
额定冲击电压(Rated surge voltage)				6000V			
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)				--			
固定螺丝(Mounting Screw) , 扭矩(torque)				--			
剥线长度(Wire stripping length)				--			
使用温度(Operating temperature)				-40℃ up to +115℃(UL) / -40℃ up to +120℃(IEC)			
存储温度(Storage temperature)				-40℃ up to +70℃			
存储相对湿度(Storage relative humidity)				≤70%			
焊接方式(Soldering recommend)		Wave soldering ,260℃ 8S Max					

■ 订购方式(How to order)

TLCH	5	00	R	XXXX	XXP	X
Series No. 系列号	Pitch间距 5=7.62mm	Differentiate Number 区分号	Connection angle 角度 R=180° plug-in to board	Special code 特编号 XXXX=custom-made	No. of Poles 极数 02 ~ 24P	Color 颜色 Grey : M19

插头 (Female Connector) — single row



P/N : TLCPL-500
Wiring orientation :
180°(wire to plug-in)
Rated : 630V,20A , 2.5mm²
Spring clamp unit



P/N : TLCP-500F
Wiring orientation :
180°(wire to plug-in)
Rated : 630V,20A , 2.5mm²
Spring clamp unit



P/N : TLCP-500
Wiring orientation :
180°(wire to plug-in)
Rated : 630V,20A , 2.5mm²
Spring clamp unit
With locking levers