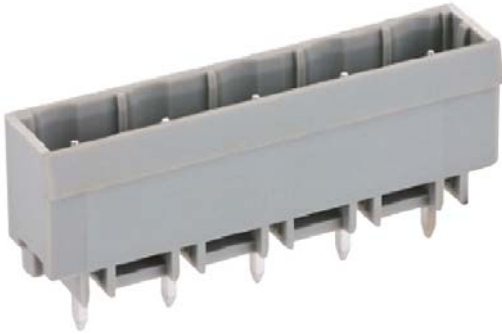


■ 图示(Pic. shown) : TLCH-500V-05P-M19

General.

Multi Connection System Rated : 630V,20A

Single row ,7.62mm pitch , 02-24 Pole

Orientation:180°(plug-in to board)


认证 (Approval) :



■ 技术参数Technical Data

UL应用组别(UL Application group) IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
	B	C	D			
				III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	150V	300V	400V	630V	630V
额定电流(Rated current)	16A	16A	10A	20A	20A	20A
额定连接容量(Rated connection capacity)	--			--		
绝缘材料(Insulation Material)		PA66 UL94 V-0				
绝缘材料组别(Material group)		I				
电流承载部件材料和镀层(Material & Plating of Current carrier)		Copper alloy , Tin plated				
接线弹片材料(Material of Clamp spring)		--				
耐电压(1分钟)(Withstanding Voltage/1Min)		1600V				
额定冲击电压(Rated surge voltage)		6000V				
接线螺丝(Wire clamp unit Screw)，最大扭矩(torque Max.)		--				
固定螺丝(Mounting Screw)，扭矩(torque)		--				
剥线长度(Wire stripping length)		--				
使用温度(Operating temperature)		-40℃ up to +115℃(UL) / -40℃ up to +120℃(IEC)				
存储温度(Storage temperature)		-40℃ up to +70℃				
存储相对湿度(Storage relative humidity)		≤70%				
焊接方式(Soldering recommend)	Wave soldering ,260℃ 8S Max					

■ 订购方式(How to order)

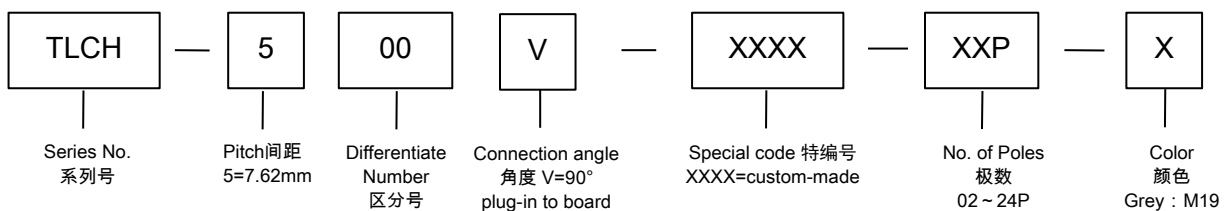

■ 插头 (Female Connector) — single row



P/N : TLCP-500
Wiring orientation :
180°(wire to plug-in)
Rated : 630V,20A , 2.5mm²
Spring clamp unit



P/N : TLCP-500F
Wiring orientation :
180°(wire to plug-in)
Rated : 630V,20A , 2.5mm²
Spring clamp unit



P/N : TLCPL-500
Wiring orientation :
180°(wire to plug-in)
Rated : 630V,20A , 2.5mm²
Spring clamp unit
With locking levers