


QUICK PLUG CONNECTOR P.C.B.-TQS-B-6.3

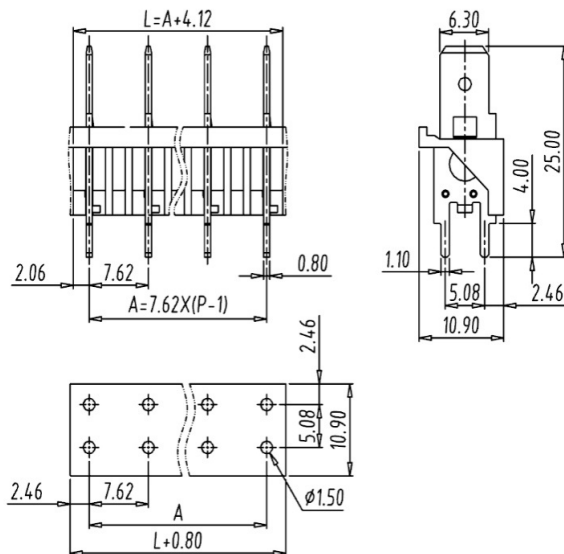

■ 图示(Pic. shown) : TQS-B-6.3-04P-K

General. Quick plug connector P.C.B Rated : 300V,16A

Single row , 7.62mm pitch , 02-11 Pole

Orientation: 90°(plug-in to board)

Screw clamp unit:

认证 (Approval) :



■ 技术参数Technical Data		UL standard			IEC standard		
UL应用组别(UL Application group)		UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		B	C	D			
额定电压(Rated voltage)		300V	300V	300V	--	--	--
额定电流(Rated current)		16A	16A	10A	--	--	--
额定连接容量(Rated connection capacity)		--			--		
绝缘材料(Insulation Material)				PC UL 94 V0			
绝缘材料组别(Material group)				IIIa			
电流承载部件材料和镀层(Material & Plating of Current carrier)				Steel , Tin plated			
接线弹片材料(Material of Clamp spring)				--			
耐电压(1分钟)(Withstanding Voltage/1Min)				1600V			
额定冲击电压(Rated surge voltage)				--			
适合的母端接线范围(Suitable Wire Range in female contact)				14AWG			
固定螺丝(Mounting Screw) , 扭矩(torque)				--			
剥线长度(Wire stripping length)				--			
使用温度(Operating temperature)				-40°C up to +125°C			
存储温度(Storage temperature)				-40°C up to +70°C			
存储相对湿度(Storage relative humidity)				≤70%			
焊接方式(Soldering recommend)		Wave soldering ,260°C 8S Max					

■ 订购方式(How to order)

TQ	S	B	6.3	XXXX	XXP	X
Series No. 系列号	Connection angle 角度 V=90° plug-in to board	Pitch 间距 B=7.62mm	Tab Specification 插片规格	Special code 特编号 XXXX=custom-made blank=standard	No. of Poles 极数 02-11P	Color 颜色 Black: K

Web:www.tielee.com TEL:+86-574-6347-9600,6389-6436

Mail : sale@china-tianli.cn

地址:中国浙江省宁波杭州湾新区庵东工业园区纬三路138号

ADD : 138 , Weisan Rd.,Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China