
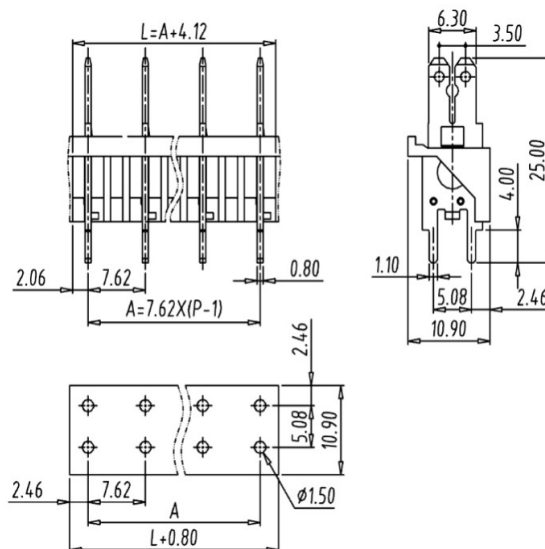


QUICK PLUG CONNECTOR P.C.B.-TQS-B-2863



■ 图示(Pic. shown) : TQS-B-2863-04P-K

General. Quick plug connector P.C.B Rated : 300V,16A

Single row , 7.62mm pitch , 02-11 Pole

Orientation: 90°(plug-in to board)

Screw clamp unit:

认证 (Approval) :



■ 技术参数Technical Data	UL standard			IEC standard		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	300V	300V	--	--	--
额定电流(Rated current)	16A	16A	10A	--	--	--
额定连接容量(Rated connection capacity)	--			--		
绝缘材料(Insulation Material)	PC UL 94 V0					
绝缘材料组别(Material group)	IIIa					
电流承载部件材料和镀层(Material & Plating of Current carrier)	Steel , Tin plated					
接线弹片材料(Material of Clamp spring)	--					
耐电压(1分钟)(Withstanding Voltage/1Min)	1600V					
额定冲击电压(Rated surge voltage)	--					
适合的母端接线范围(Suitable Wire Range in female contact)	14AWG					
固定螺丝(Mounting Screw) , 扭矩(torque)	--					
剥线长度(Wire stripping length)	--					
使用温度(Operating temperature)	-40°C up to +125°C					
存储温度(Storage temperature)	-40°C up to +70°C					
存储相对湿度(Storage relative humidity)	≤70%					
焊接方式(Soldering recommend)	Wave soldering ,260°C 8S Max					

■ 订购方式(How to order)

TQ	S	B	2863	XXXX	XXP	X
Series No. 系列号	Connection angle 角度 V=90° plug-in to board	Pitch 间距 B=7.62mm	Tab Specification 插片规格	Special code 特编号 XXXX=custom-made blank=standard	No. of Poles 极数 02-11P	Color 颜色 Black: K