
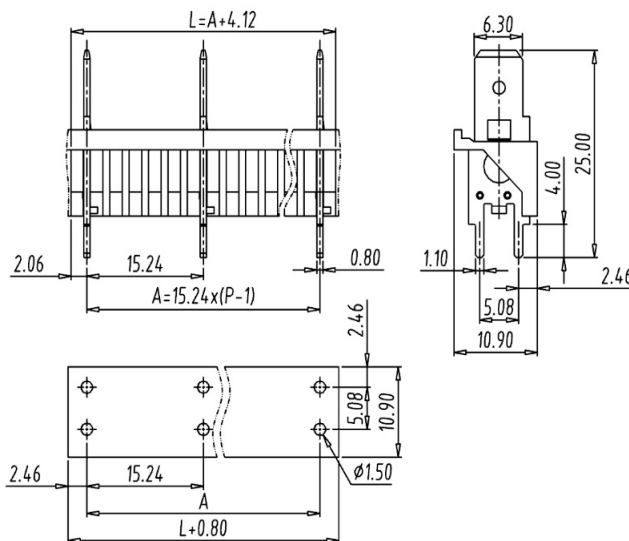


QUICK PLUG CONNECTOR P.C.B.-TQS-E-6.3

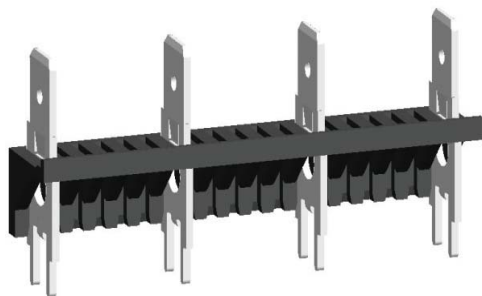

■ 图示(Pic. shown) : TQS-E-6.3-04P-K

General. Quick plug connector P.C.B Rated : 300V,16A
Single row , 15.24mm pitch , 02-06 Pole
Orientation: 90°(plug-in to board)
Screw clamp unit:

认证 (Approval) :



■ 技术参数Technical Data	UL standard			IEC standard		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D			
额定电压(Rated voltage)	300V	300V	300V	--	--	--
额定电流(Rated current)	16A	16A	10A	--	--	--
额定连接容量(Rated connection capacity)	--			--		
绝缘材料(Insulation Material)		PC UL 94 V0				
绝缘材料组别(Material group)		IIIa				
电流承载部件材料和镀层(Material & Plating of Current carrier)		Steel , Tin plated				
接线弹片材料(Material of Clamp spring)		--				
耐电压(1分钟)(Withstanding Voltage/1Min)		1600V				
额定冲击电压(Rated surge voltage)		--				
适合的母端接线范围(Suitable Wire Range in female contact)		14AWG				
固定螺丝(Mounting Screw) , 扭矩(torque)		--				
剥线长度(Wire stripping length)		--				
使用温度(Operating temperature)		-40°C up to +125°C				
存储温度(Storage temperature)		-40°C up to +70°C				
存储相对湿度(Storage relative humidity)		≤70%				
焊接方式(Soldering recommend)	Wave soldering ,260°C 8S Max					

■ 订购方式(How to order)

TQ	S	E	6.3	XXXX	XXP	X
Series No. 系列号	Connection angle 角度 V=90° plug-in to board	Pitch 间距 E=15.24mm	Tab Specification 插片规格	Special code 特编号 XXXX=custom-made blank=standard	No. of Poles 极数 02-06P	Color 颜色 Black: K

Web:www.tielee.com TEL:+86-574-6347-9600,6389-6436

Mail : sale@china-tianli.cn

地址:中国浙江省宁波杭州湾新区庵东工业园区纬三路138号

ADD : 138 , Weisan Rd.,Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China