


PCB terminal block — BARRIER SERIES— T950C-01-0792

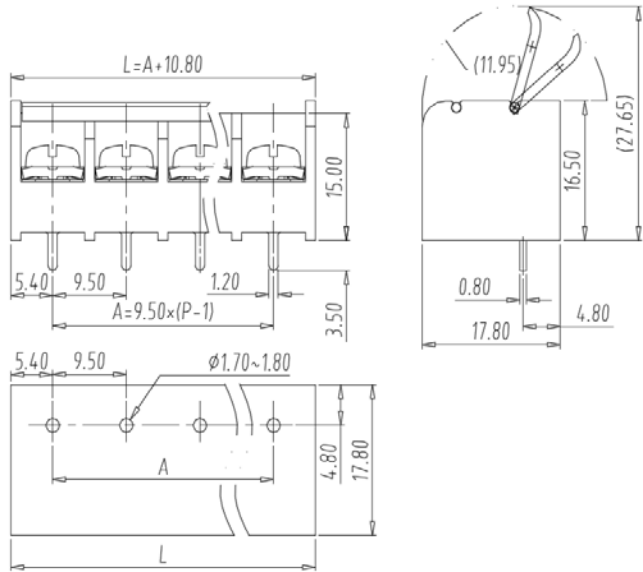

■ 图示(Pic. shown) : T950C-01-0792-05P-KC

General.	PCB terminal block	Rated : 300V, 25A , 12AWG
	Single row , 9.50mm pitch , 02-15 Pole	
	Wiring Connection : 180°(wire to board)	
	Screw clamp unit: M3.5 , 0.8~1.0N·m	

认证 (Approval) :



■ 技术参数Technical Data		UL standard			IEC standard		
UL应用组别(UL Application group)		UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)							
		B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)		300V	--	300V	630V	630V	1000
额定电流(Rated current)		25A	--	10A	27A	27A	27A
额定连接容量(Rated connection capacity)		22~12			0.5~2.5,4		
刚性导线横截面 (AWG) (Conductor cross section,solid)				22~12			
柔性导线横截面 (AWG) (Conductor cross section,stranded)				22~12			
刚性导线横截面 (mm2) (Conductor cross section,rigid)				0.5~4			
柔性导线横截面 (mm2) (Conductor cross section,flexible)				0.5~2.5			
绝缘材料(Insulation Material)				PA66 UL94V-0			
绝缘材料组别(Material group)				I			
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper alloy , Tin plated			
接线弹片材料(Material of Clamp spring)				--			
耐电压(1分钟)(Withstanding Voltage/1Min)				3100V			
额定冲击电压(Rated surge voltage)				6000V			
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)				M3.5 , 1.0N·m			
固定螺丝(Mounting Screw) , 扭矩(torque)				--			
剥线长度(Wire stripping length)				9 ~ 10mm			
使用温度(Operating temperature)				-40℃ up to +105℃			
存储温度(Storage temperature)				-40℃ up to +70℃			
存储相对湿度(Storage relative humidity)				≤70%			
焊接方式(Soldering recommend)		Wave soldering ,260℃ 8S Max					

■ 订购方式(How to order)

T	950	C	01	0792	XXP	K	C
Series No. 系列号	Pitch间距 P=9.50mm	with cover 带透明盖	Solder Pin Spec 焊针规格	Special code 特编号 XXXX=custom-made 0792=standard	No. of Poles 极数 02-20P	Color 颜色 Black: K	Screw Spec. 螺丝规格 C=Cross Type