


PCB terminal block — TL series(Raising Clamp)—TL403V

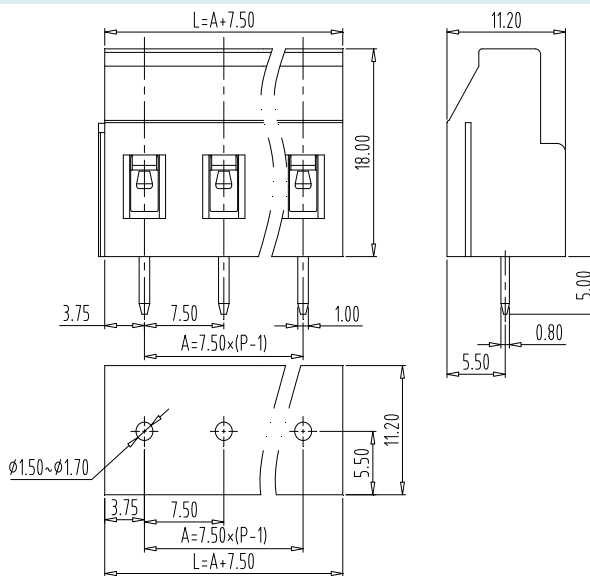

■ 图示(Pic. shown) : TL403V-03P-G12S

General. PCB terminal block Rated :630V,24A , 2.5mm²
Single row , 7.50mm pitch , 02P-24P Pole
Wiring orientation: 180°(wire-to-board)
Screw clamp unit: M3, 0.5N·m

认证 (Approval) :



■ 技术参数Technical Data	UL standard			IEC standard		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	150V	300V	--	630V	--
额定电流(Rated current)	25A	25A	10A	--	24A	--
额定连接容量(Rated connection capacity)	28-12AWG,10AWG(SOL)			0.2mm ² ~2.5mm ² ,4mm ² (SOL)		
刚性导线横截面 (AWG) (Conductor cross section,solid)				28~10		
柔性导线横截面 (AWG) (Conductor cross section,stranded)				28~12		
刚性导线横截面 (mm2) (Conductor cross section,rigid)				0.2~4.0		
柔性导线横截面 (mm2) (Conductor cross section,flexible)				0.2~2.5		
柔性导线横截面，不带绝缘套管的冷压头(mm2) (Conductor cross section flexible，with ferrule without plastic				0.25~2.5		
柔性导线横截面，带绝缘套管的冷压头(mm2) (Conductor cross section flexible，with ferrule with plastic sleeve)				0.25~2.5		
2根具有相同横截面的导线，柔性，带TWIN套管及塑料套管(mm2) (2 conductors with the same section flexible with TWIN ferrule and plastic sleeve)				0.5~1.5		
绝缘材料(Insulation Material)				PA66 UL94 V-0		
绝缘材料组别(Material group)				I		
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper alloy ，Tin plated		
接线弹片材料(Material of Clamp spring)				--		
耐电压(1分钟)(Withstanding Voltage/1Min)				2500V		
额定冲击电压(Rated surge voltage)				6KV		
接线螺丝(Wire clamp unit Screw)，最大扭矩(torque Max.)				M3，0.5Nm		
固定螺丝(Mounting Screw)，扭矩(torque)				--		
剥线长度(Wire stripping length)				7.8mm		
使用温度(Operating temperature)				-40℃ up to +120℃(UL)/-40℃ up to +115℃(IEC)		
存储温度(Storage temperature)				-40℃ up to +70℃		
存储相对湿度(Storage relative humidity)				≤70%		
焊接方式(Soldering recommend)	Wave soldering ,260℃ 5S Max (Single Wave) , 260℃ 10S Max(Double Wave)					

■ 订购方式(How to order)

TL	4	03	V	XXXX	XXP	G12	S
Series No. 系列号	Pitch间距 4=7.50mm	Differentiate Number 区分号	Connection angle 角度V=180° wire-to-board	Special code 特编号 XXXX=custom-made blank=standard	No. of Poles 极数 02-24P	Color 颜色 Green: G12	Screw Type 螺丝S=Slot C=Cross