
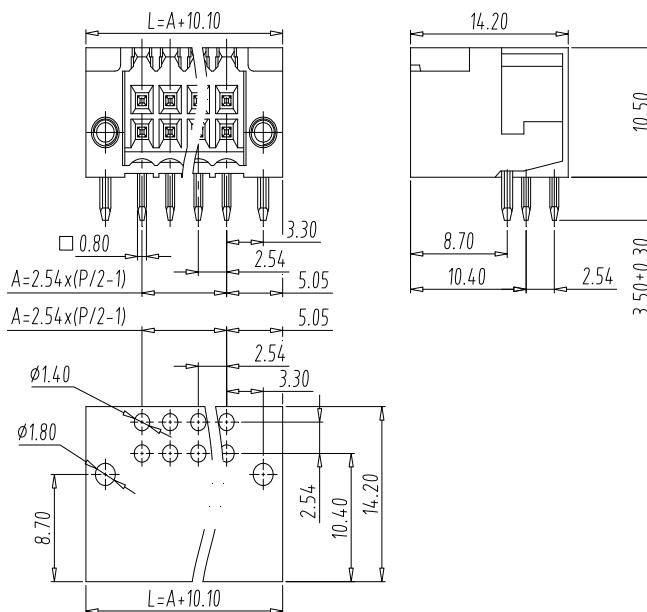


PCB Connector — TLP series (Pin header)— TLPHDW-020R

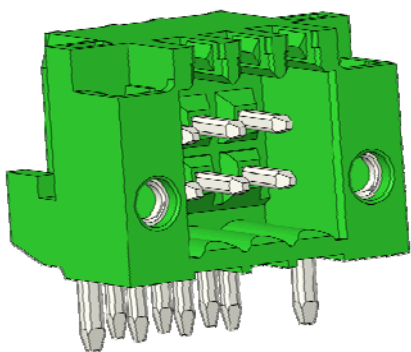

■ 图示(Pic. shown) : TLPHDW-020R-06P(G28)


General. PCB Connector Rated : 320V,6A
Single row , 2.54mm pitch , 04-48 Pole
Orientation:180°(plug-in to board)

认证 (Approval) : 

■ 技术参数Technical Data	UL standard			IEC standard		
UL应用组别(UL Application group) IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
	B	C	D			
额定电压(Rated voltage)	150V	--	--	--	--	320V
额定电流(Rated current)	5A	--	--	--	--	6A
额定连接容量(Rated connection capacity)	--			--		
绝缘材料(Insulation Material)				PA66 UL94 V-0		
绝缘材料组别(Material group)				I		
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper alloy , Tin plated		
接线弹片材料(Material of Clamp spring)				--		
耐电压(1分钟)(Withstanding Voltage/1Min)				1300V		
额定冲击电压(Rated surge voltage)				2500V		
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)				--		
固定螺丝(Mounting Screw) , 扭矩(torque)				--		
剥线长度(Wire stripping length)				--		
使用温度(Operating temperature)				-40℃ up to +115℃		
存储温度(Storage temperature)				-40℃ up to +70℃		
存储相对湿度(Storage relative humidity)				≤70%		
焊接方式(Soldering recommend)				Wave soldering ,260℃ 5S		

■ 订购方式(How to order)

TLPHDW	0	20	R	XXXX	XXP	(X)
Series No. 系列号	Pitch间距 0=2.54mm	Differentiate Number 区分号	Connection angle 角度 R=180° plug-in to board	Special code 特编号 XXXX=custom-made blank=standard	No. of Poles 极数 04-48P	Color 颜色 Green : G28

 插头 (Female Connector) — single row

P/N : TLPDWD-020

Wiring orientation :

180°(wire to plug-in)

Rated : 320V,6A , 0.5mm²

Spring clamp unit.

With screw flange