


PCB terminal block — TL series (Wire Protector)—TL213-5.0

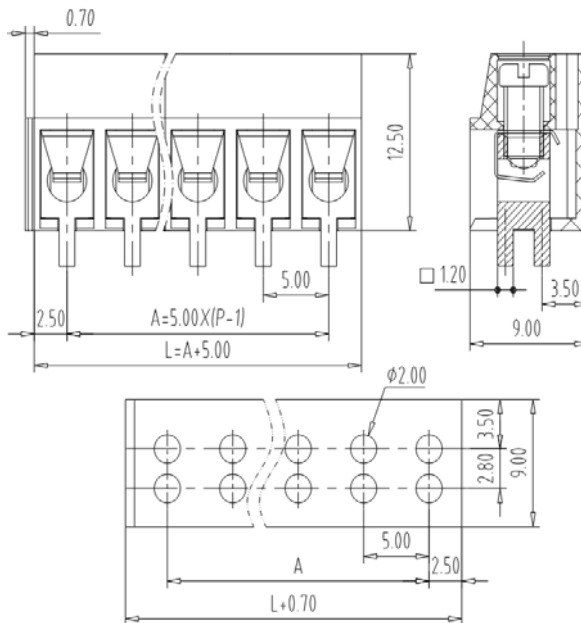

■ 图示(Pic. shown) : TL213-5.0-05P-KS

General. PCB Terminal block Rated : 320V,24A , 0.34-2.5mm²
Single row,5.00mm pitch , 02-24 Pole
Wiring orientation:180°(Wire-to-board)
Screw clamp unit: M3, 0.5Nm Max

认证 (Approval) :

技术参数 Technical Data	UL standard			IEC standard		
	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
UL应用组别(UL Application group)						
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	--	300V	--	320V	--
额定电流(Rated current)	16A	--	10A	--	24A	--
额定连接容量(Rated connection capacity)	22 ~ 14AWG Sol&Str			0.34 ~ 2.5mm ² Sol&Str		
绝缘材料(Insulation Material)	PA66 UL94 V-0					
电流承载部件材料和镀层(Material & Plating of Current carrier)	Copper alloy , Tin plated					
接线弹片材料(Material of Clamp spring)	--					
绝缘电阻(Insulation Resistance)	500MΩ or more at DC500V					
耐电压(1分钟)(Withstanding Voltage/1Min)	2200V					
额定冲击电压(Rated surge voltage)	--					
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)	M3 , 0.5Nm Max					
固定螺丝(Mounting Screw) , 扭矩(torque)	--					
剥线长度(Wire stripping length)	6.5-7.5mm					
使用温度(Operating temperature)	-40°C up to +105°C					
焊接方式(Soldering recommend)	Wave soldering,260 °C 5S Max (Single Wave), 260 °C 10S Max(Double Wave)					

订购方式(How to order)

